


Fully Adjustable Needle with Free Flow Check

全調型 節流閥 附單向閥



Model Code 產品型號	Cavity 閥孔型號	Capacity 流量 (l/min)	Dimension 尺寸 (mm)				Torque 安裝扭力 (Nm)	Weight 重量 (kg)	Max. Pressure 最大壓力 (bar)
			a	b	c				
					L	K			
NC2B	T13A	25	34.9	22.2	58	64	40/50	0.14	350
NC3B	T5A	50	41.1	28.6	67	73	60/70	0.26	350
NC6B	T16A	100	61.9	31.8	73	79	200/215	0.58	350
NC8B	T18A	200	79.4	41.3	84	90	465/500	1.23	350

Option Ordering Information

選購型號

NC 2 B - T13A - L C N

① Model Code 產品型號

② Capacity (l/min) 流量

2: 25 3: 50 6: 100 8: 200

③ Cavity & Maximum Orifice 閥孔型號與最大節流孔

T13A	T5A	T16A	T18A
4.8mm	6.3mm	9.6mm	14.2mm

④ Control 控制方式

L: standard screw adjustment 標準螺絲調整


K: handknob with lock knob 調鈕調整

⑤ Cracking Pressure (bar) 開閥壓力

A: 0.3 C: 2.0 E: 5.0

⑥ Seal 油封材質

N: buna-N V: viton

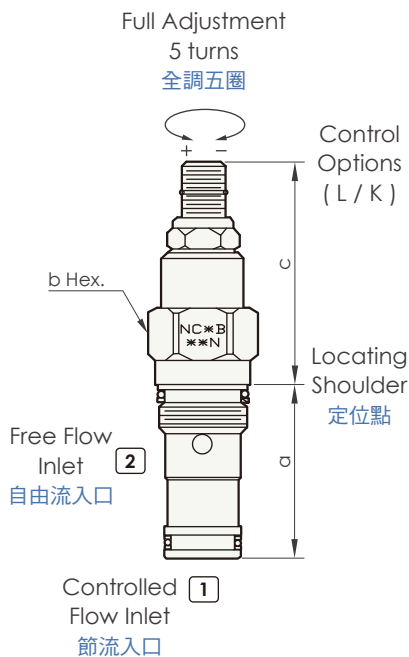

Performance Curves

性能曲線

Adjustment Sensitivity

at 7bar Differential

7bar 壓降的調流曲線

